

Godswill


Godswill Machinery

CE

GAFB SERIES

Bottom Full Auto Prefeeder


下印式全自動送紙機

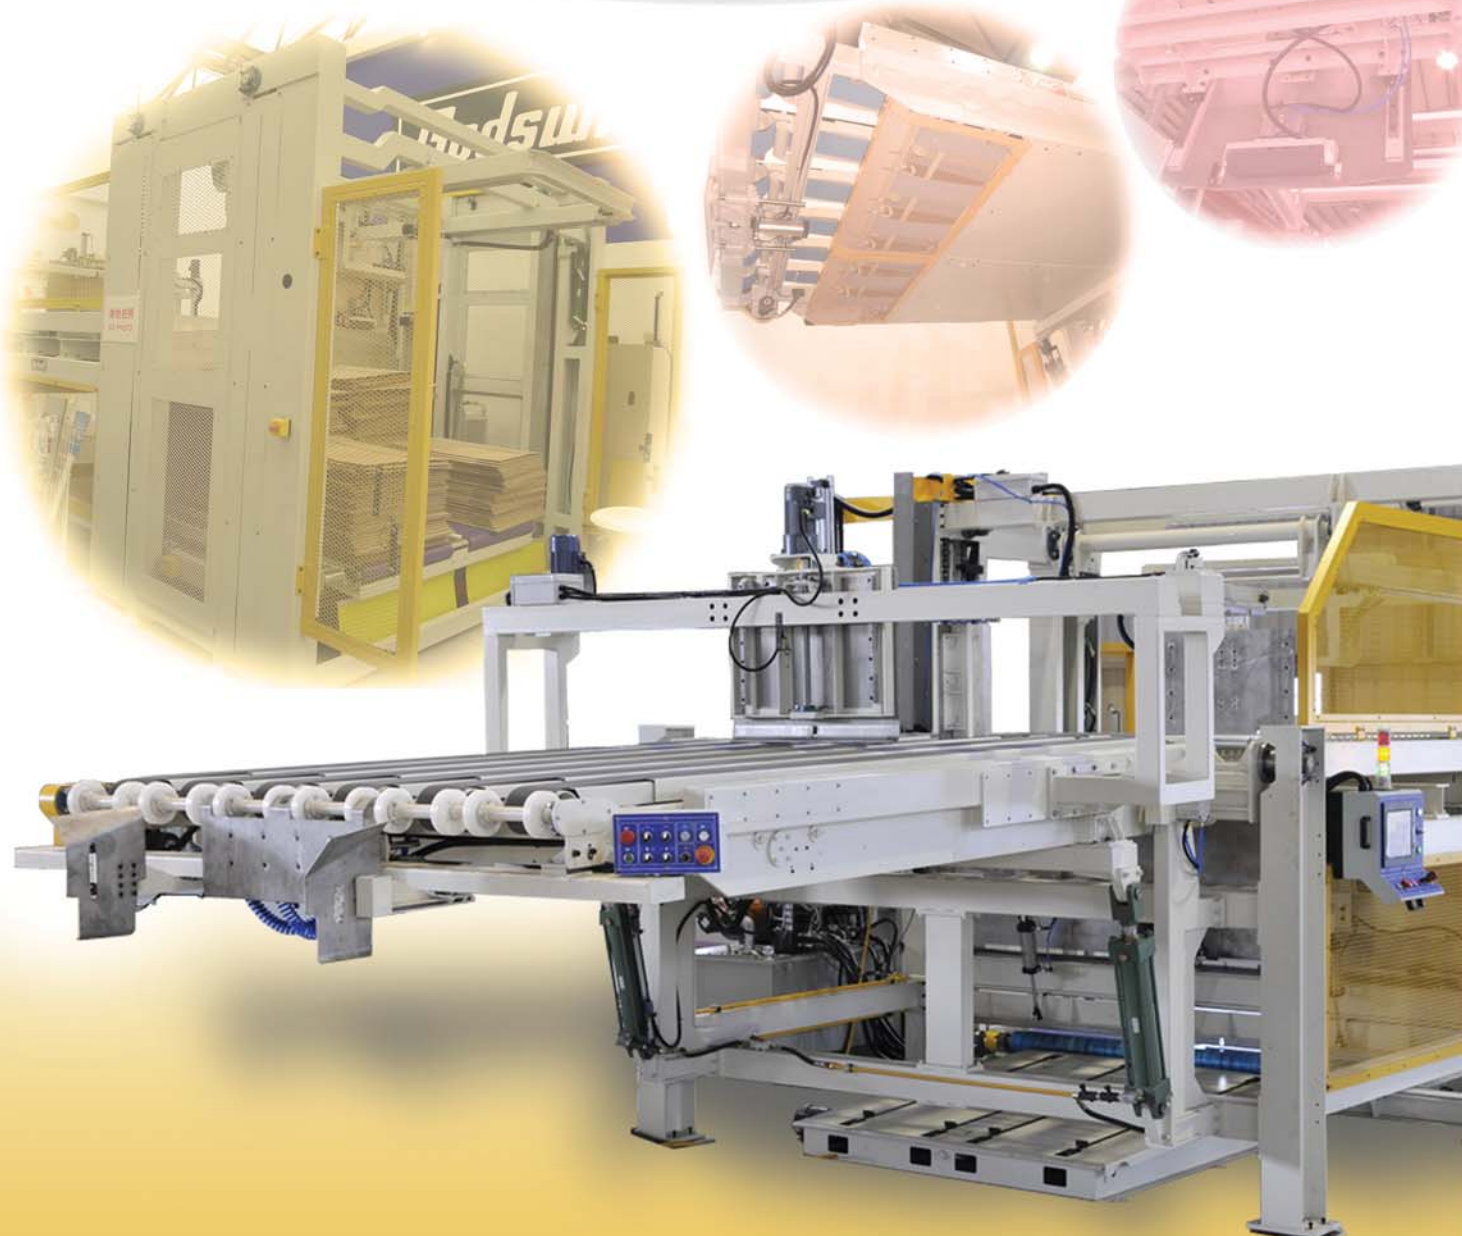

Machine Size 機械外型尺寸

機型 Type	A	B	C	D	E	F	G	H	I	J	K	L	M
GAFB-6	8688	5411	1463	1164	1750	3450	900	2872	2560	2210	2026	2408	190
GAFB-7	8938	5541	1583	1164	1750	3450	1000	3172	2860	2210	2026	2558	220
GAFB-8	9768	5571	1983	1564	1750	3450	1000	3472	3160	2210	2026	2708	250
GAFB-9	11123	6126	2383	1964	2000	3705	1500	3772	3460	2514	2330	2858	300
GAFB-10	11123	6126	2383	1964	2000	3705	1500	4072	3760	2514	2330	3008	300
GAFB-12	11583	6186	2583	2164	2000	3705	1850	4572	4260	3014	2830	3508	360
GAFB-15	13318	7321	2883	2464	2500	4200	1850	5472	5160	3950	3766	4408	500

※規格設計，本公司保有變更之權利，恕不另行通知！ Specifications And Design May Be Change Without Prior Notice.

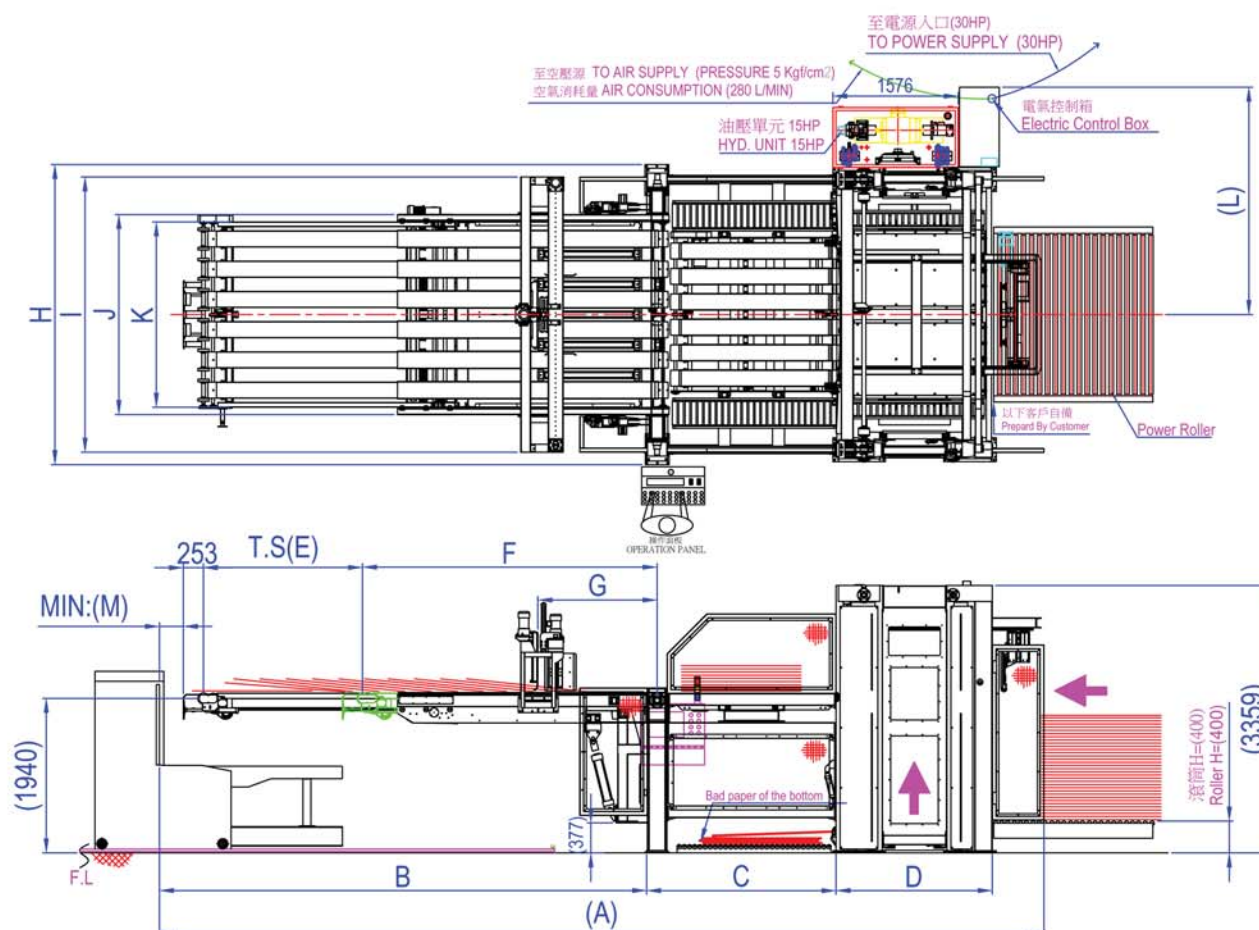

Specifications 規格表

機型 Type	GAFB-6	GAFB-7	GAFB-8	GAFB-9	GAFB-10	GAFB-12	GAFB-15
最大送紙尺寸 Max. Sheet Size	900X1800 (mm)	1000X2200 (mm)	1200X2500 (mm)	1500X2800 (mm)	1600X3000 (mm)	1600X3600 (mm)	2000X4500 (mm)
最小送紙尺寸 Min. Sheet Size	190X360 (mm)	220X500 (mm)	250X560 (mm)	300X600 (mm)	300X600 (mm)	365X650 (mm)	600X850 (mm)
最大載紙重量 Max. Load	1500 Kg	1500 Kg	1500 Kg	1800 Kg	1800 Kg	2000 Kg	2000 Kg
最大載紙高度 Max. Stack Height	1800 mm	1800 mm	1800 mm	1800 mm	1800 mm	1800 mm	1800 mm
最大送紙速度 Max. Capacity	350 Sheet /min	330 Sheet /min	300 Sheet /min	280 Sheet /min	250 Sheet /min	200 Sheet /min	150 Sheet /min
總動力 Power Required	22 HP	22 HP	22 HP	24 HP	24 HP	25 HP	25 HP
機械總重 M/C Weight	9000 Kg	9000 Kg	9700 Kg	10500 Kg	11200 Kg	12500 Kg	13600 Kg

Godswill 冠裕機械股份有限公司
裕恒機械股份有限公司

GODSWILL PAPER MACHINERY CO., LTD.

台中市神岡區神洲北路88號
No.88, Shenzhou N. Rd., Shengang Dist.,
Taichung City 429, Taiwan (R.O.C.)
TEL: 886-4-25268912 FAX: 886-4-25278683
Email: service@godswill.com.tw
http://www.godswill.com.tw

GODSWILL PAPER MACHINERY CO., LTD.

GAFB GAFB GAFB GAFB GAFB GAFB GAFB

Bottom Full Auto Prefeeder

▶▶ 下印式全自動送紙機



Auto Stitching



Special Features 特點

- HYDRAULIC DRIVE CYLINDER IS POWERFUL AND SAFETY.
- SIDE AND FRONT PNEUMATIC JOGGING FOR SHEETS SQUARING.
- THE SHINGLE GATE IS OPERATOR ADJUSTABLE FOR SPEED OR CONDITION OF BOARD.
- CONTINUOUS TYPE FEEDING, SEND THE CONTINUOUS FEW PAPER TO FLEXO, AND EXTEND THE LIFE OF FEED ROLLER.
- HYDRAULIC SET WITH LOW-NOISE, HIGHLY EFFECTIVE AND LESS MAINTENANCE.
- PREFEEDER BELT SPEED DEPEND ON THE FLEXO CAN BE ADJUSTABLE.
- STRETCHABLE FEEDING TABLE WITH ASSISTANT CONTROL BOX OFFER CONVENIENT OPERATION.

- 油壓驅動機構，出力大動作確實且安全性高。
- 側齊紙板及後拍齊板採空壓操作，確實拍齊又不傷紙板。
- 閘門式出紙可依據餵紙速度需求調整閘門高度。
- 瓦楞式連續送紙，至印刷機送紙部單張或少量下紙，延長印刷機送紙輪壽命。
- 高效能低噪音的油壓系統故障率低。
- 皮帶速度可依印刷機速度；無段調整。
- 電動伸縮皮帶易於調整操作，副控箱方便印車操作者控制。



Gate 閘門



Pusher 推紙器



Paper Discharge Conveyor
廢紙排出輸送機



GAFB SERIES



All operation functions are controlled through a programmable logic controller. The machine has been passed CE safety measure identification.

電控系統經由PLC可程式控制器控制系統，穩定檢修容易。歐規CE安全認證通過，安全性優越。



Aadjust stack
center cylinder

▼ 紙疊校正缸



▲ Hydraulic set with low-noise, highly effective and less main-tenance.

高效能低噪音的油壓系統，故障率低。

HMI operate interface is conversation to set up, and error message offer easy way for operator to do trouble shooting and maintenance.

人機操作介面，對話式設定，以及故障提示說明，易於操作及維修。

